

Nationwide House Energy Rating Scheme

NatHERS Certificate No. 8YSCP88CLC

Generated on 15 Dec 2020 using FirstRate5: 5.3.0a (3.21)

Property

Address 2, 7 New City Road , MULLUMBIMBY, NSW, 2482
Lot/DP 1/1080317
NCC Class* Class 1a
Type New Home

Plans

Main plan 7 New City Road
Prepared by Frank Steart Architect

Construction and environment

Assessed floor area (m²)*	Exposure type
Conditioned* 53.6	suburban
Unconditioned* 4.1	NatHERS climate zone
Total 57.7	10, MULLUMBIMBY
Garage -	



Accredited assessor


Name Duncan Hope
Business name Senica Consultancy Group
Email duncan@senica.com.au
Phone 61280067784
Accreditation No. DMN/14/1658
Assessor Accrediting Organisation DMN
Declaration of interest Declaration completed: no conflicts

National Construction Code (NCC) requirements

The NCC's requirements for NatHERS-rated houses are detailed in 3.12.0(a)(i) and 3.12.5 of the NCC Volume Two. For apartments the requirements are detailed in J0.2 and J5 to J8 of the NCC Volume One.

In NCC 2019, these requirements include minimum star ratings and separate heating and cooling load limits that need to be met by buildings and apartments through the NatHERS assessment. Requirements additional to the NatHERS assessment that must also be satisfied include, but are not limited to: insulation installation methods, thermal breaks, building sealing, water heating and pumping, and artificial lighting requirements. The NCC and NatHERS Heating and Cooling Load Limits (Australian Building Codes Board Standard) are available at www.abcb.gov.au.

State and territory variations and additions to the NCC may also apply.

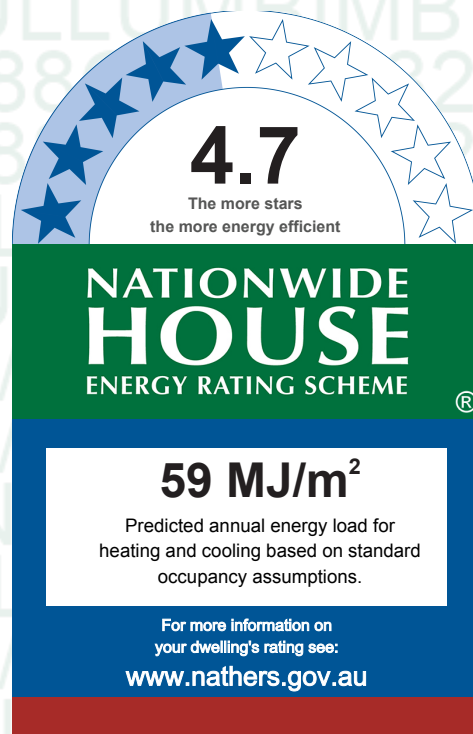

Thermal performance

Heating	Cooling
21.1	37.9
MJ/m²	MJ/m²

About the rating

NatHERS software models the expected thermal energy loads using information about the design and construction, climate and common patterns of household use. The software does not take into account appliances, apart from the airflow impacts from ceiling fans.

Verification

To verify this certificate, scan the QR code or visit <https://www.fr5.com.au/QRCodeLanding?PublicId=8YSCP88CLC> When using either link, ensure you are visiting www.FR5.com.au.



Certificate Check

Ensure the dwelling is designed and then built as per the NatHERS Certificate. While you need to check the accuracy of the whole Certificate, the following spot check covers some important items impacting the dwelling's rating.

Genuine certificate

Does this Certificate match the one available at the web address or QR code in the verification box on the front page?
Does the set of NatHERS-stamped plans for the dwelling have a Certificate number on the stamp that matches this Certificate?

Ceiling penetrations*

Does the 'number' and 'type' of ceiling penetrations (e.g. downlights, exhaust fans, etc) shown on the stamped plans or installed, match what is shown in this Certificate?

Windows

Does the installed window meet the substitution tolerances (SHGC and U-value) and window type, of the window shown on this Certificate?

Apartment entrance doors

Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.

Exposure*

Has the appropriate exposure level (terrain) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".

Provisional* values

Have provisional values been used in the assessment and, if so, noted in "additional notes" below?

Additional Notes

Due to limitations with the window library, windows have been used in a generic manner. Please ignore the brand/make and refer to the U-Value and SHGC requirements.

If downlights are used in construction, they should be Insulation Continuous rated so that insulation may be laid over the downlights with no requirement for holes in the insulation.

Window and glazed door *type and performance*

Default* windows

				Substitution tolerance ranges	
Window ID	Window description	Maximum U-value*	SHGC*	SHGC lower limit	SHGC upper limit
				No Data Available	

Custom* windows

Window ID	Window description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
A&L-003-01 A	Al Sliding Window SG 3Clr	6.15	0.78	0.74	0.82
GJA-070-08 A	Type 245 Aluminium Sliding Door SG 4EA	4.44	0.61	0.58	0.64

Window and glazed door *Schedule*

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Bedroom	A&L-003-01 A	W4	1500	900	louvre	90.0	NW	No

* Refer to glossary.

Bedroom	GJA-070-08 A	D2	2100	1800	sliding	45.0	NE	No
Bathroom	A&L-003-01 A	W5	500	1200	louvre	90.0	SW	No
Dining	A&L-003-01 A	D4	2100	820	casement	100.0	SW	No
Kitchen/Living	A&L-003-01 A	W7	1500	2700	louvre	90.0	NE	No
Kitchen/Living	A&L-003-01 A	W8	450	2700	sliding	30.0	NE	No
Kitchen/Living	GJA-070-08 A	D1	2100	3600	sliding	45.0	NW	No
Kitchen/Living	A&L-003-01 A	W3	1500	900	louvre	90.0	NW	No
Kitchen/Living	GJA-070-08 A	W1	500	3600	louvre	90.0	NW	No
Kitchen/Living	A&L-003-01 A	W2	500	900	louvre	90.0	NW	No
Kitchen/Living	A&L-003-01 A	W6	600	2400	fixed	0.0	SE	No
Kitchen/Living	A&L-003-01 A	W	2100	600	louvre	60.0	SE	No

Roof window *type and performance value*

Default* roof windows

				Substitution tolerance ranges	
Window ID	Window description	Maximum U-value*	SHGC*	SHGC lower limit	SHGC upper limit
				No Data Available	

Custom* roof windows

				Substitution tolerance ranges	
Window ID	Window description	Maximum U-value*	SHGC*	SHGC lower limit	SHGC upper limit
				No Data Available	

Roof window *schedule*

Location	Window ID	Window no.	Opening %	Area (m ²)	Orientation	Outdoor shade	Indoor shade
No Data Available							

Skylight *type and performance*

Skylight ID	Skylight description
No Data Available	

Skylight *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length (mm)	Area (m ²)	Orient-ation	Outdoor shade	Diffuser	Skylight shaft reflectance
No Data Available								

External door *schedule*

Location	Height (mm)	Width (mm)	Opening %	Orientation
Kitchen/Living	2100	820	100.0	SE

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade (colour)	Bulk insulation (R-value)	Reflective wall wrap*
---------	-----------	-------------------	---------------------	---------------------------	-----------------------

1	Colourbond - 90mm Colourbond Sheet with R2.0	0.5	Medium	Rockwool batt: R2.0 (R2.0)	Yes
2	FC Sheet - 90mm FC Sheet with R2.0	0.5	Medium	Glass fibre batt: R2.0 (R2.0)	No
3	Weatherboard - 90mm Weatherboard with R2.0	0.5	Medium	Glass fibre batt: R2.0 (R2.0)	No

External wall *schedule*

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
Bedroom	1	2400	3997	NW	750	No
Bedroom	1	2500	3686	SW	611	No
Bedroom	1	2500	3686	NE	6549	Yes
Bathroom	2	3300	1378	SW	2071	No
Dining	2	3000	3005	SW	2076	No
Dining	2	2400	2974	SE	728	No
Kitchen/Living	2	2750	1685	NE	590	No
Kitchen/Living	3	2400	2814	NE	739	No
Kitchen/Living	3	500	2814	NE	500	No
Kitchen/Living	2	2400	5803	NW	4541	Yes
Kitchen/Living	3	850	5803	NW	500	Yes
Kitchen/Living	2	2400	6578	SE	731	No

Internal wall *type*

Wall ID	Wall type	Area (m²)	Bulk insulation
1	Internal - Plasterboard Stud Wall (w/ R2.0)	16.3	Glass fibre batt: R2.0 (R2.0)
2	FR5 - Internal Plasterboard Stud Wall	7.8	
3	FR5 - Brick Cavity	2.8	

Floor *type*

Location	Construction	Area (m²)	Sub-floor ventilation	Added insulation (R-value)	Covering
Bedroom	KINGSPAN - Permifloor	14.7	Open	R0.1	Timber
Bathroom	KINGSPAN - Permifloor	4.1	Open	R0.1	Tiles
Dining	KINGSPAN - Permifloor	9.2	Open	R0.1	Timber
Kitchen/Living	KINGSPAN - Permifloor	29.7	Open	R0.1	Timber

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
Bedroom	Plasterboard	R4.3	No
Bathroom	Plasterboard	R4.3	No
Dining	Plasterboard	R4.3	No
Kitchen/Living	Plasterboard	R4.3	No

Ceiling *penetrations**

* Refer to glossary.

Location	Quantity	Type	Diameter (mm)	Sealed/unsealed
No Data Available				

Ceiling *fans*

Location	Quantity	Diameter (mm)
Bedroom	1	1400
Dining	1	1400

Roof *type*

Construction	Added insulation (R-value)	Solar absorptance	Roof shade
Framed:Flat - Flat Framed (Metal Deck)	0.0	0.5	Medium

Explanatory Notes

About this report

A NatHERS rating is a comprehensive, dynamic computer modelling evaluation of a home, using the floorplans, elevations and specifications to estimate an energy load. It addresses the building layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings), but does not cover the water or energy use of appliances or energy production of solar panels.

Ratings are based on a unique climate zone where the home is located and are generated using standard assumptions, including occupancy patterns and thermostat settings. The actual energy consumption of a home may vary significantly from the predicted energy load, as the assumptions used in the rating will not match actual usage patterns. For example, the number of occupants and personal heating or cooling preferences will vary.

While the figures are an indicative guide to energy use, they can be used as a reliable guide for comparing different dwelling designs and to demonstrate that the design meets the energy efficiency requirements in the National Construction Code. Homes that are energy efficient use less energy, are warmer on cool days, cooler on hot days and cost less to run. The higher the star rating the more thermally efficient the dwelling is.

Accredited assessors

To ensure the NatHERS Certificate is of a high quality, always use an accredited or licenced assessor. NatHERS accredited assessors are members of a professional body called an Assessor Accrediting Organisation (AAO).

Australian Capital Territory (ACT) licensed assessors may only produce assessments for regulatory purposes using software for which they have a licence endorsement. Licence endorsements can be confirmed on the ACT licensing register

AAOs have specific quality assurance processes in place, and continuing professional development requirements, to maintain a high and consistent standard of assessments across the country. Non-accredited assessors do not have this level of quality assurance or any ongoing training requirements.

Any questions or concerns about this report should be directed to the assessor in the first instance. If the assessor is unable to address these questions or concerns, the AAO specified on the front of this certificate should be contacted.

Disclaimer

The format of the NatHERS Certificate was developed by the NatHERS Administrator. However the content of each individual certificate is entered and created by the assessor to create a NatHERS Certificate. It is the responsibility of the assessor who prepared this certificate to use NatHERS accredited software correctly and follow the NatHERS Technical Notes to produce a NatHERS Certificate.

The predicted annual energy load in this NatHERS Certificate is an estimate based on an assessment of the building by the assessor. It is not a prediction of actual energy use, but may be used to compare how other buildings are likely to perform when used in a similar way. Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, indoor air temperature and local climate.

Not all assumptions that may have been made by the assessor while using the NatHERS accredited software tool are presented in this report and further details or data files may be available from the assessor.


Glossary

Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, rangehoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure category - exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category - open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category - suburban	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category - protected	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.


National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au .
Opening Percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading device	a device fixed to windows that provides shading e.g. window awnings or screens but excludes eaves.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).

HOLLINGWORTH LANE


NEW CITY ROAD

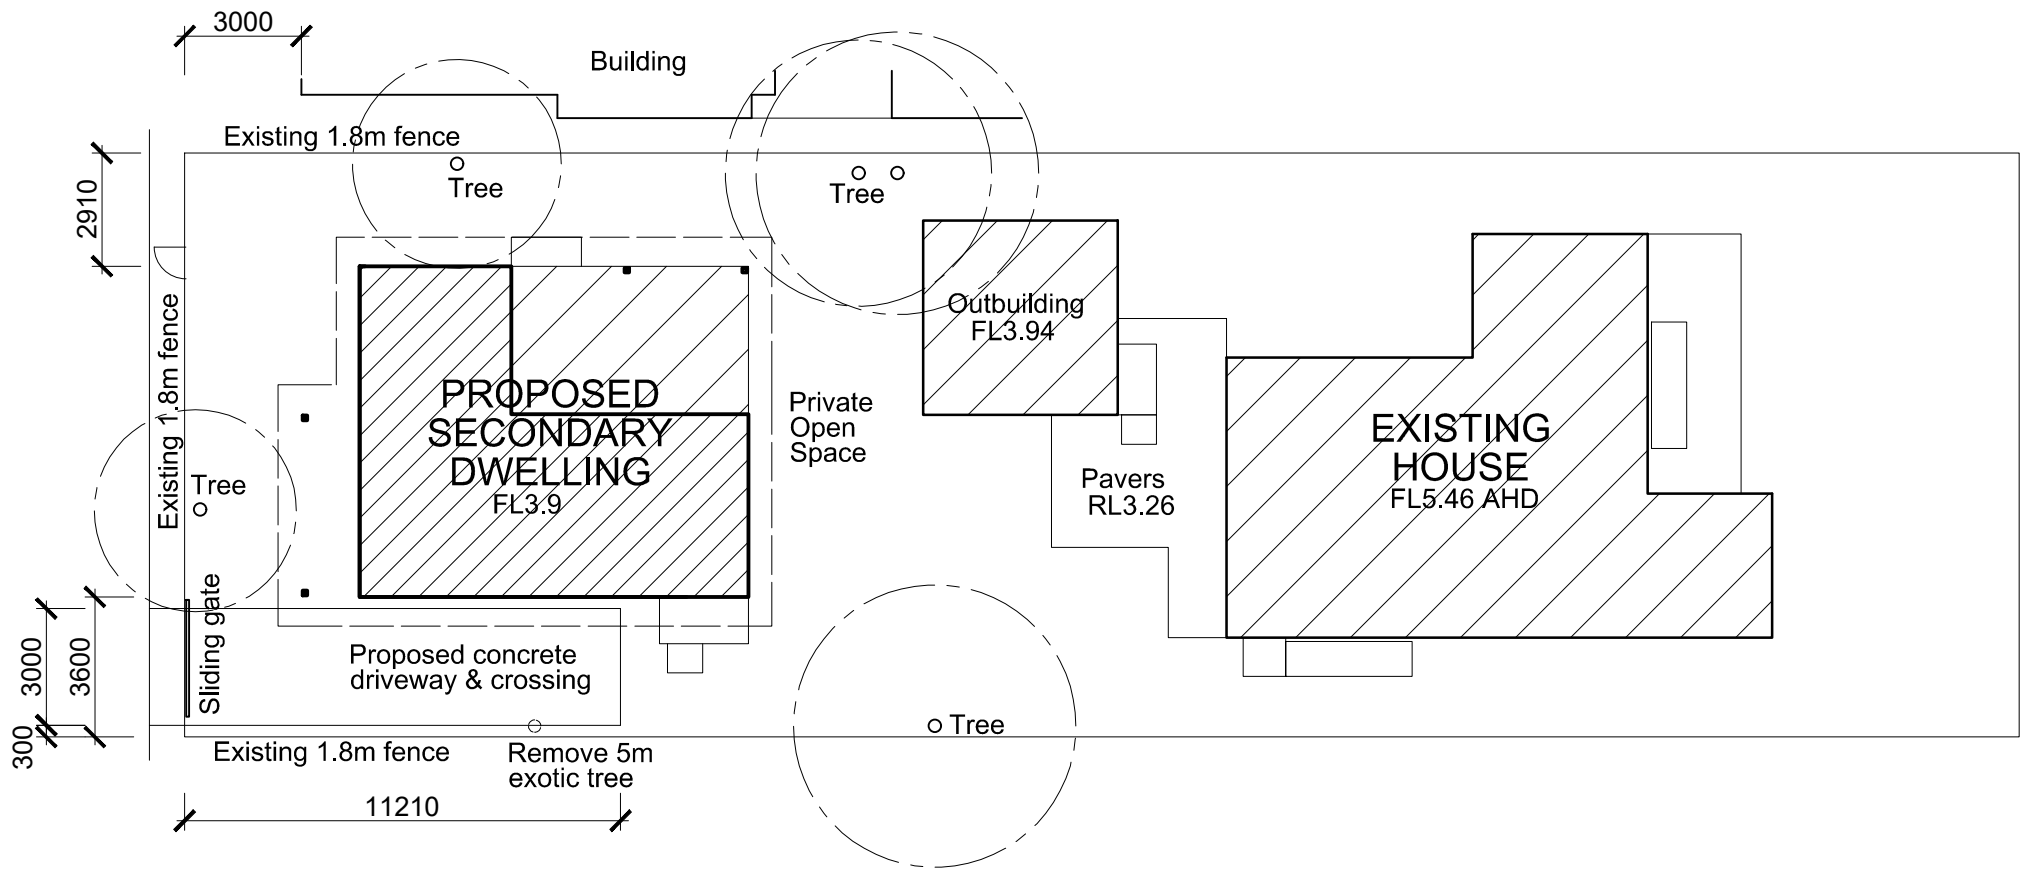


SITE PLAN

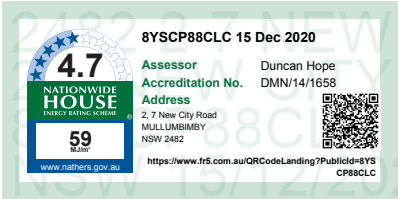

Issue A	Amendment Development application	Date Nov 2020
PROPOSED SECONDARY DWELLING		
AT: LOT 1 DP 1080317 7 NEW CITY ROAD, MULLUMBIMBY		
FOR: JESSE BOURKE		
Scale 1:200 @ A3 paper size		Sept 2020
Drawing No. A01 Issue A		Drawn FS
FRANK STEWART ARCHITECT		
Reg . NSW 6 0 7 5 (0 2) 6 6 8 5 6 9 8 4 P . O . Box 7 1 8 Byron Bay NSW 2 4 8 1		
COPYRIGHT All rights reserved. This work is copyright and cannot be reproduced or copied in any form or by any other means without the written permission of Frank Stewart Architect. Use figured dimensions in preference to scaled. Check all dimensions on site before setout or fabrication.		

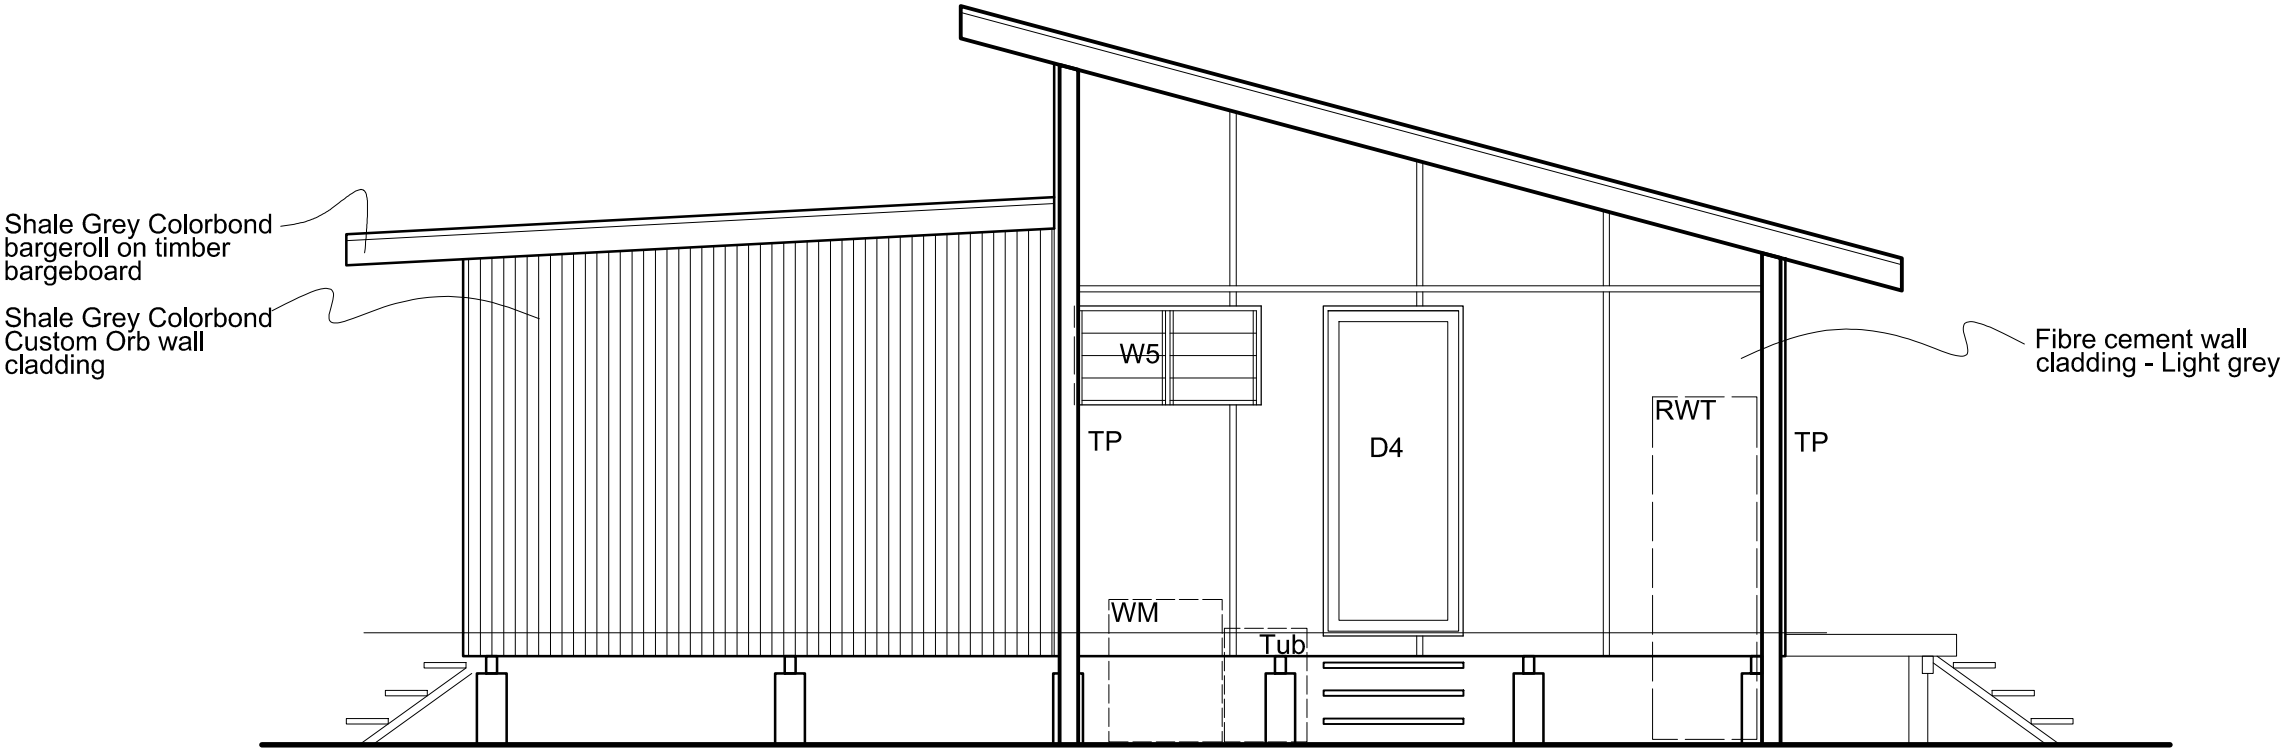

ELEVATION
SOUTH

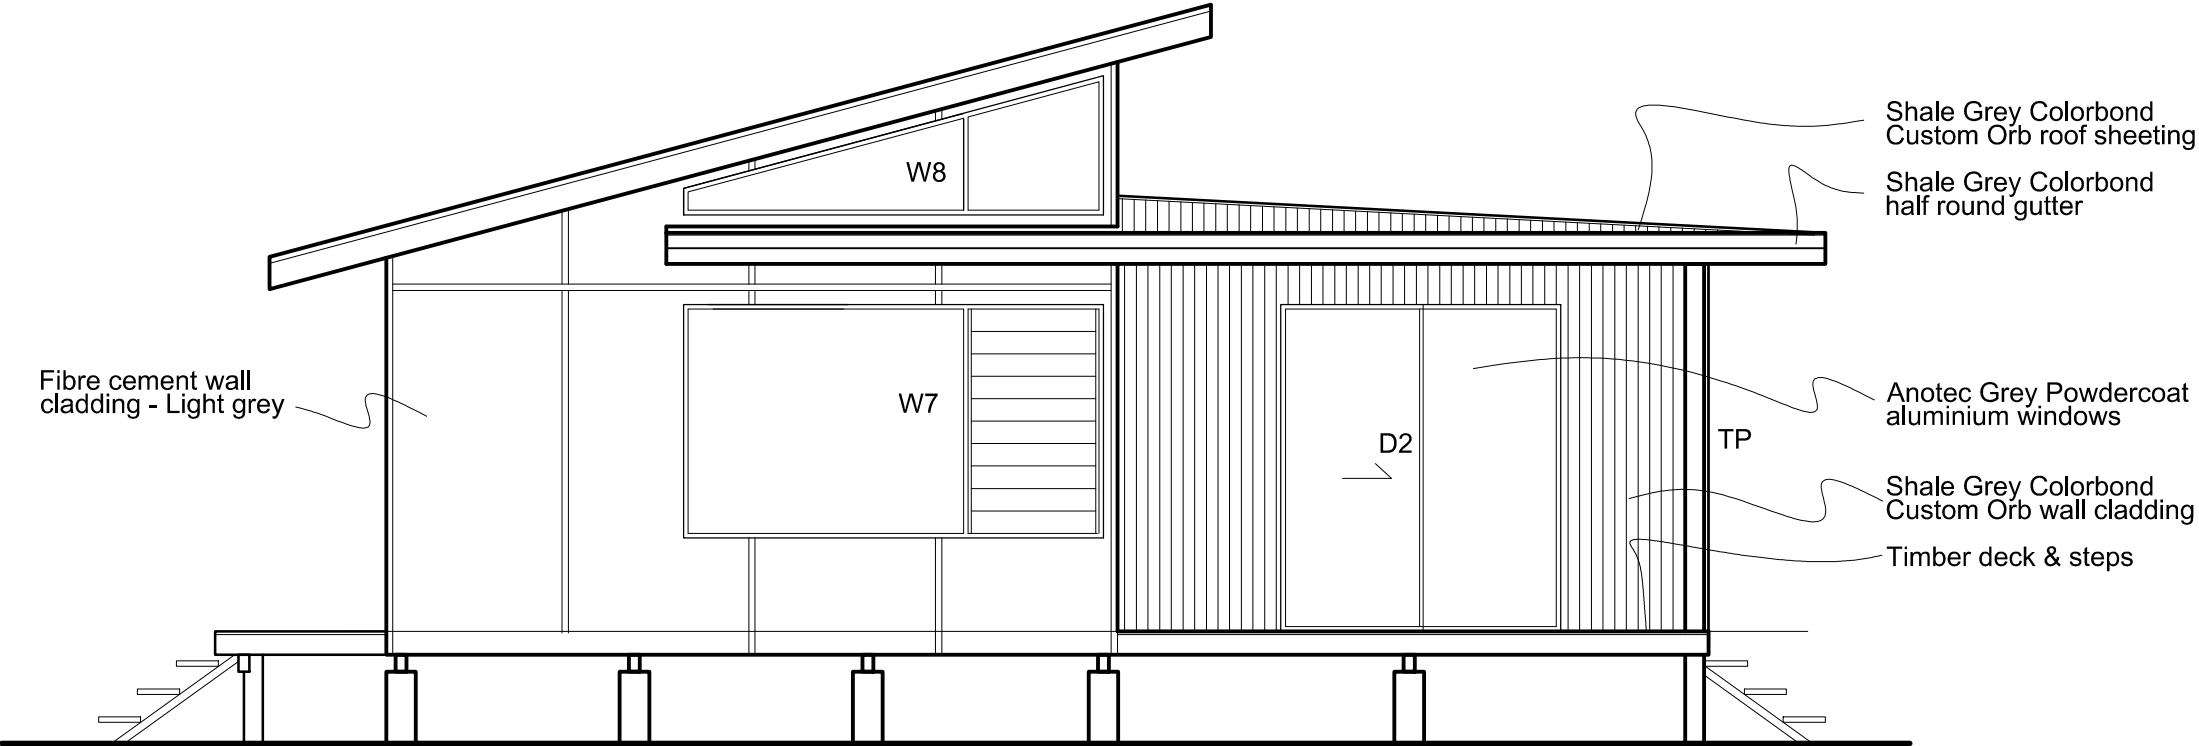

ELEVATION
NORTH

- Legend
- D Door
 - W Window
 - TP Timber post
 - RWT Rainwater tank
 - WM Washing machine

Issue	Amendment	Date
A	Development application	Nov 2020

PROPOSED SECONDARY DWELLING

AT: LOT 1 DP 1080317
7 NEW CITY ROAD, MULLUMBIMBY
FOR: JESSE BOURKE

Scale 1:50 @ A3 paper size
Drawing No. A03 Issue A


Sept 2020
Drawn FS

FRANK STEWART ARCHITECT


Reg. NSW 6075 (02) 6685 6984
P.O. Box 718 Byron Bay NSW 2481

COPYRIGHT
All rights reserved. This work is copyright and cannot be reproduced or copied in any form or by any other means without the written permission of Frank Stewart Architect. Use figured dimensions in preference to scaled. Check all dimensions on site before setout or fabrication.



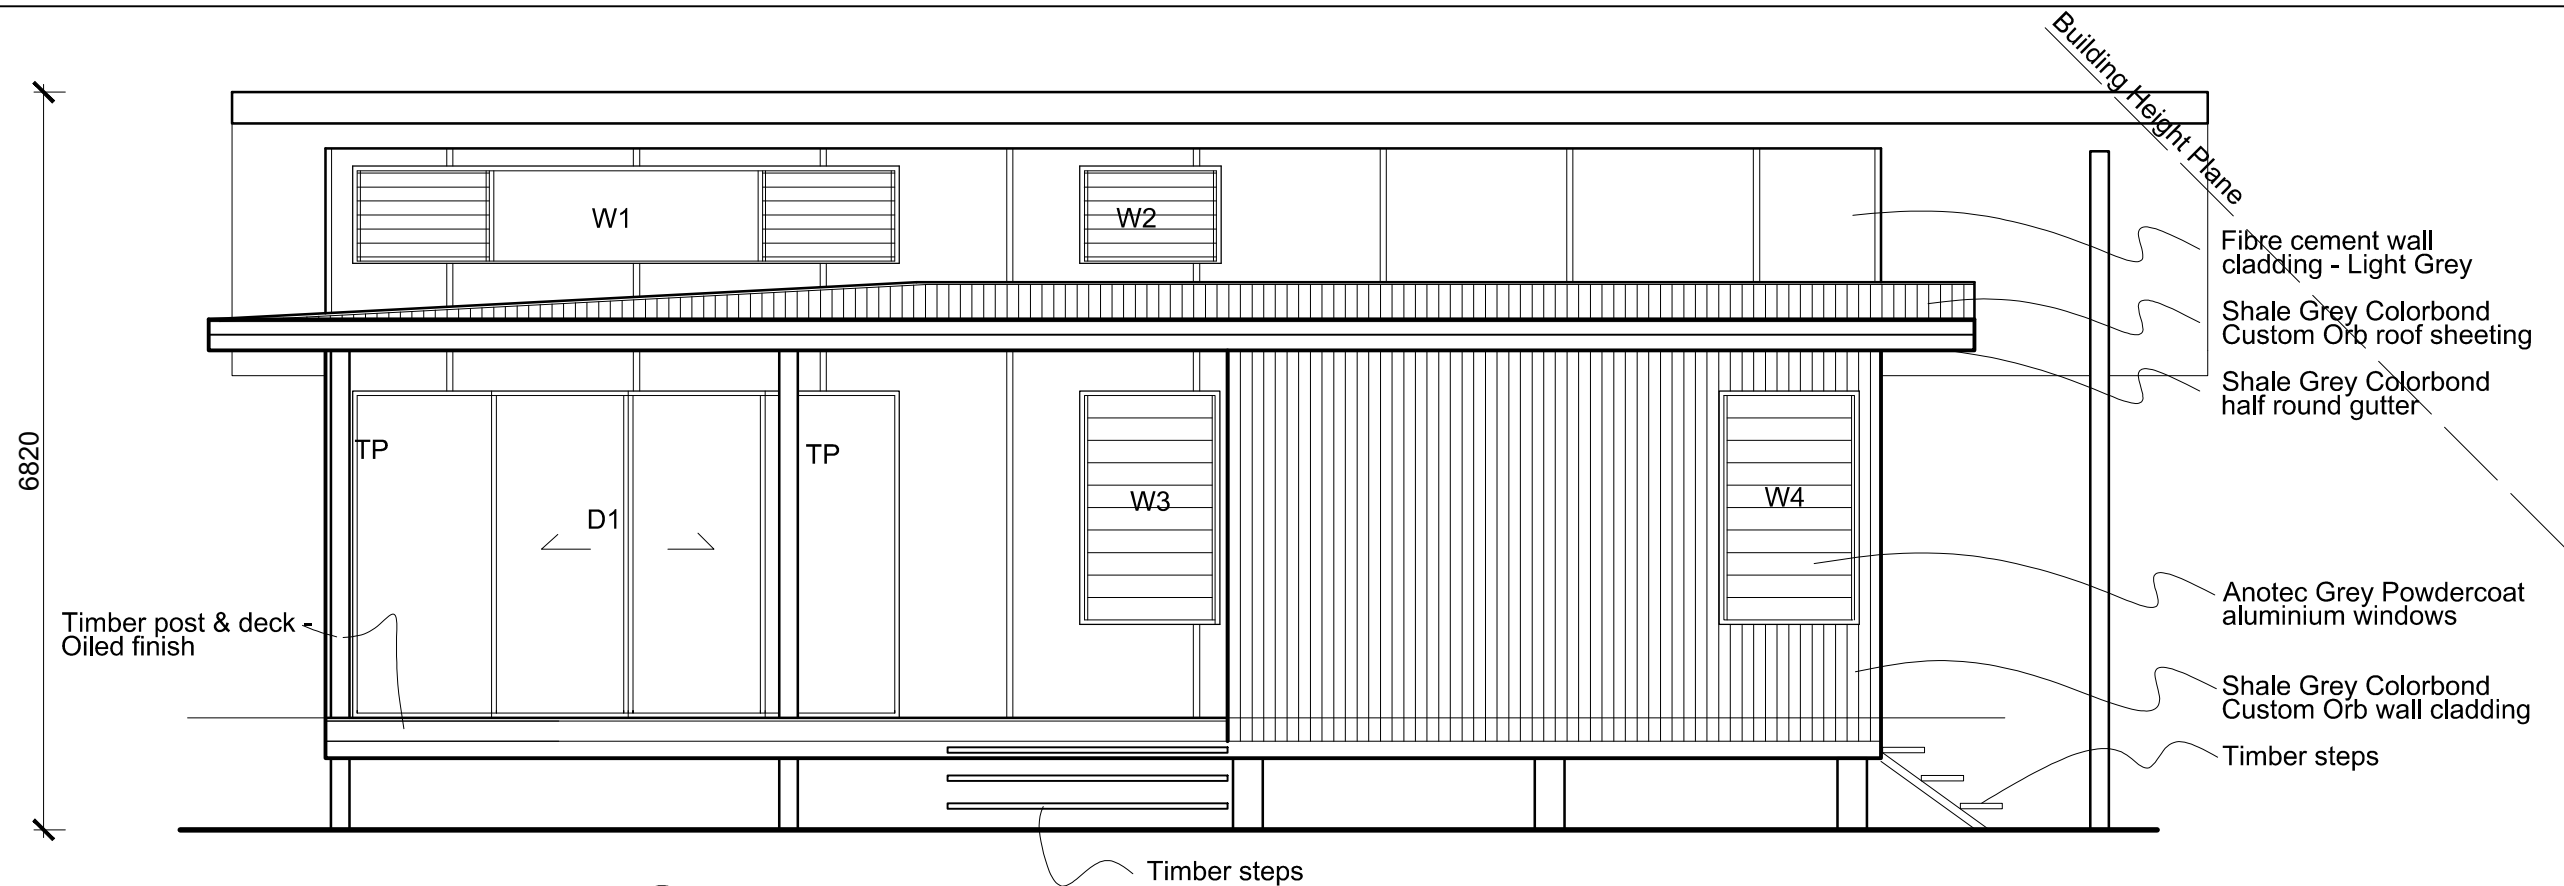


ELEVATION
WEST

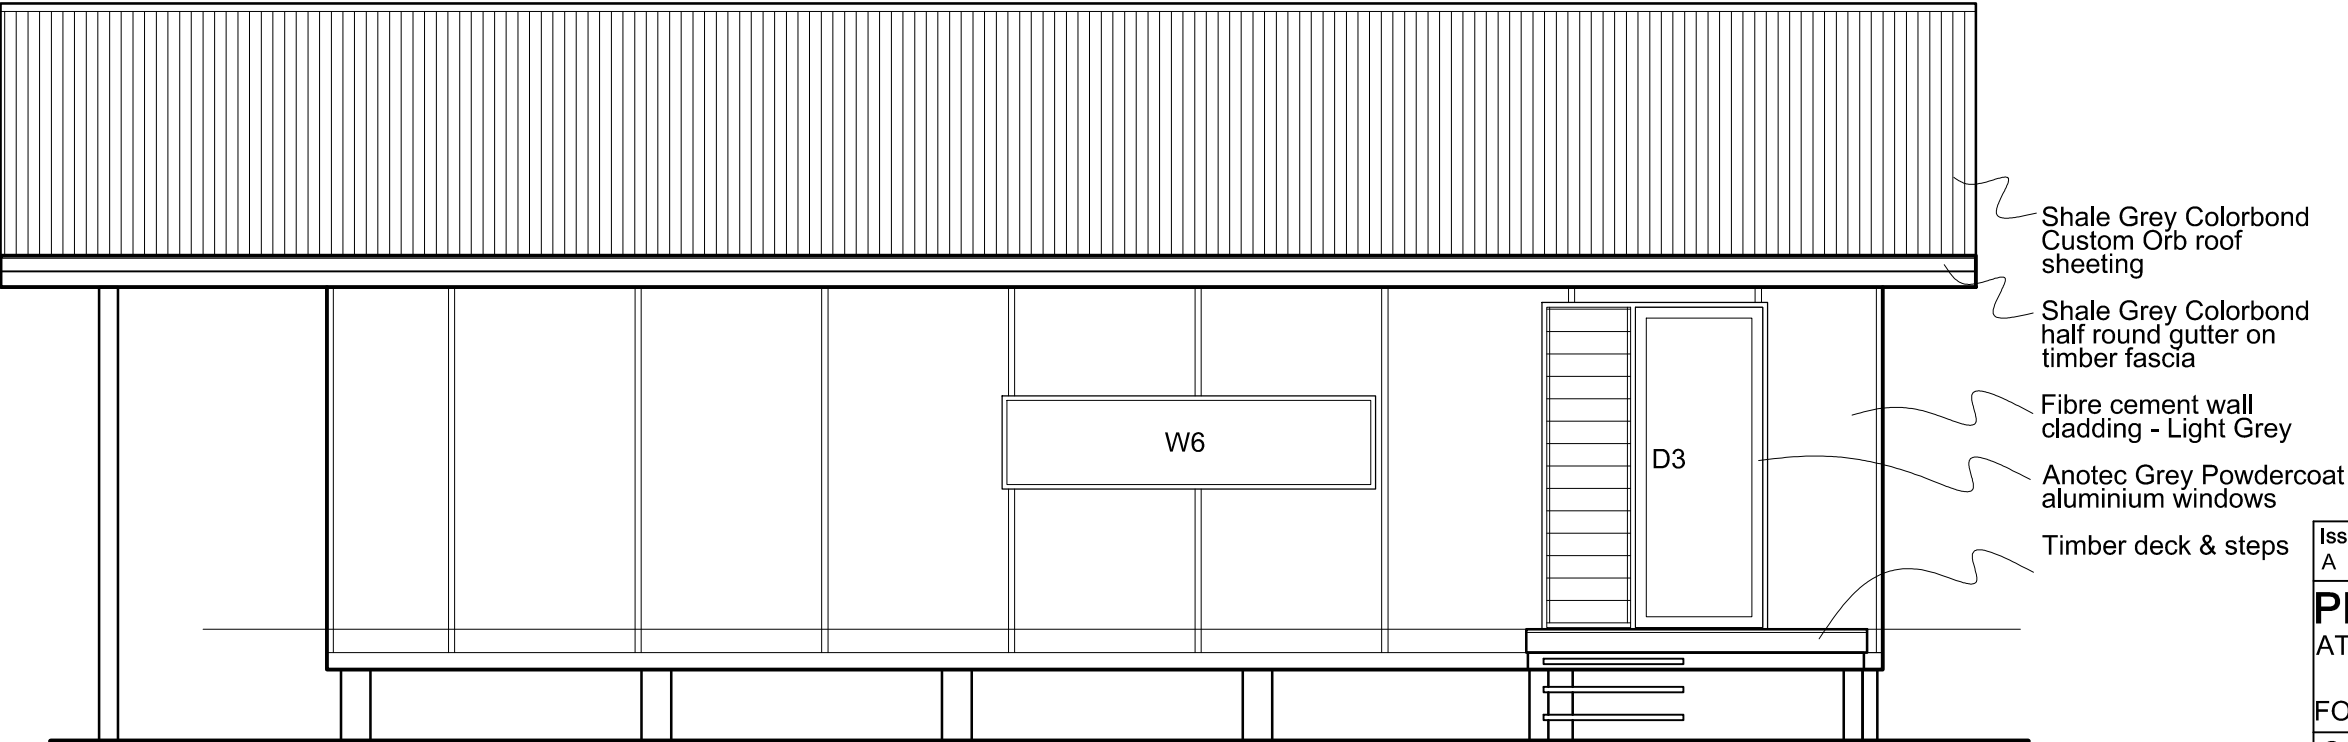


ELEVATION
EAST

Legend
D Door
W Window
TP Timber post

Issue	Amendment	Date
A	Development application	Nov 2020
PROPOSED SECONDARY DWELLING		
AT: LOT 1 DP 1080317		
7 NEW CITY ROAD, MULLUMBIMBY		
FOR: JESSE BOURKE		
Scale 1:50 @ A3 paper size		Sept 2020
Drawing No. A04 Issue A		Drawn FS
FRANK STEWART ARCHITECT		
Reg. NSW 6075 (02) 6685 6984		
P.O. Box 718 Byron Bay NSW 2481		
COPYRIGHT		
All rights reserved. This work is copyright and cannot be reproduced or copied in any form or by any other means without the written permission of Frank Stewart Architect. Use figured dimensions in preference to scaled. Check all dimensions on site before setout or fabrication.		

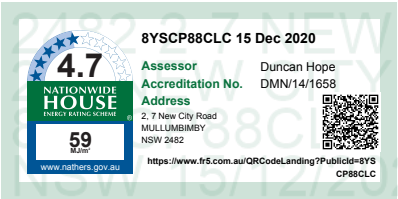

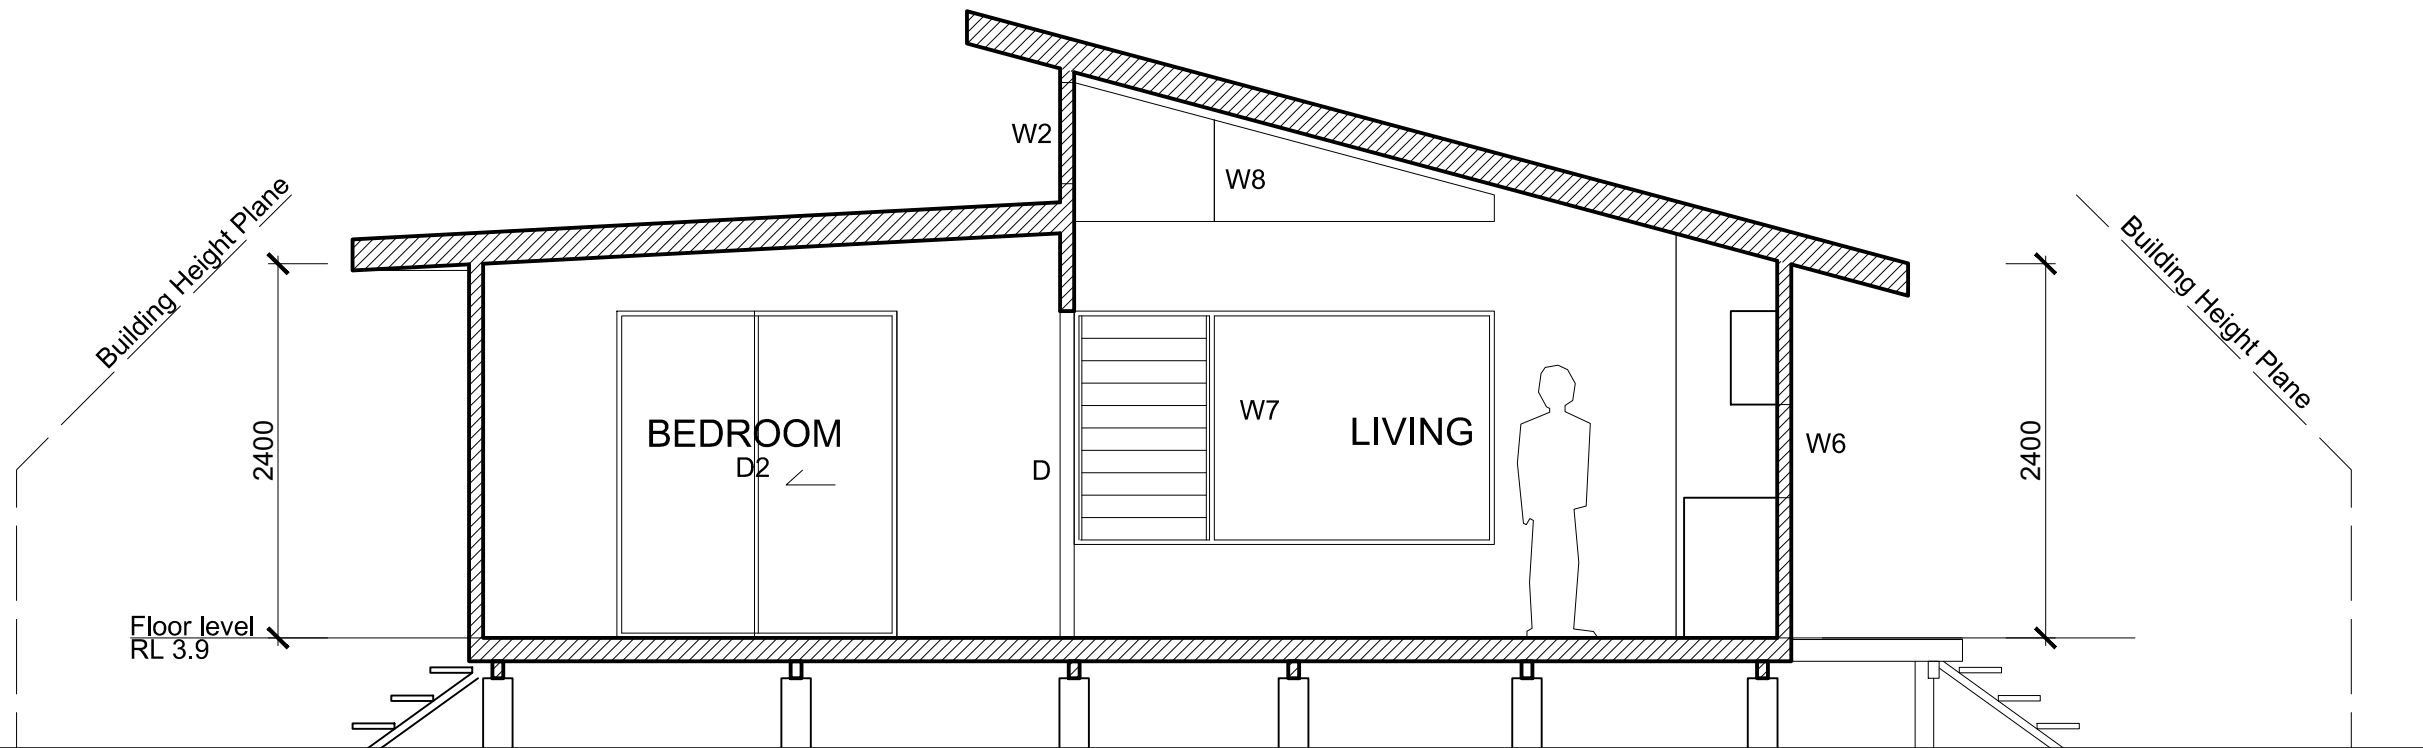

1 SECTION
A02

Legend
D Door
W Window

Issue	Amendment	Date
A	Development application	Nov 2020
PROPOSED SECONDARY DWELLING		
AT: LOT 1 DP 1080317		
7 NEW CITY ROAD, MULLUMBIMBY		
FOR: JESSE BOURKE		
Scale 1:50 @ A3 paper size		Sept 2020
Drawing No. A05 Issue A		Drawn FS
FRANK STEWART ARCHITECT		
Reg. NSW 6075 (02) 6685 6984		
P.O. Box 718 Byron Bay NSW 2481		
COPYRIGHT		
All rights reserved. This work is copyright and cannot be reproduced or copied in any form or by any other means without the written permission of Frank Stewart Architect. Use figured dimensions in preference to scaled. Check all dimensions on site before setout or fabrication.		

